
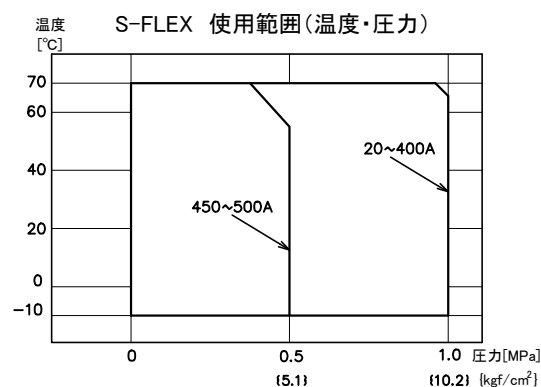


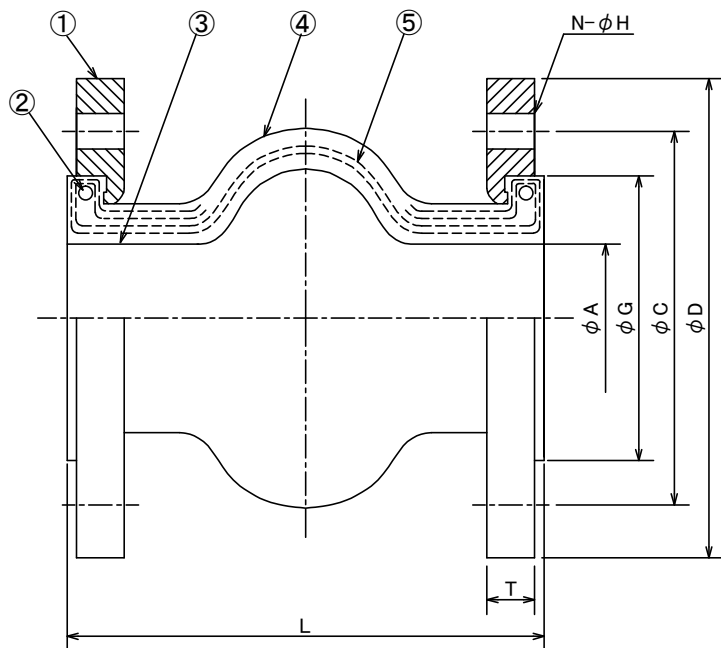

単位 : mm

呼び径	ゴム本体			フランジ				許容変位量				最高 使用圧力 (MPa)	試験 圧力 (MPa)						
	L	A	G	T	D	C	N-φH	偏心	伸長	圧縮	偏角								
20A	150	17	49	14	100	75	4-15	10	5	10	15°	1.0	1.5						
25A		23	61		125	90	4-19												
32A		37	69		16	135								100					
40A				140		105													
50A				155		120													
65A		63	106	175	140	8-19													
80A		76	116	185	150														
100A		100	150	210	175														
125A		124	180	20	250	210	8-23	20	10	20				15°	1.0	1.5			
150A	150	149	209	22	280	240													
200A	150				330	290					12-23								
200A	200	195	260		330	290	12-23												
250A	200	242	320	24	400	355	12-25				25	15	20				15°	1.0	1.5
300A		284	367		445	400	16-25												
350A		325	420		490	445	16-27												
400A		383	471	26	560	510	16-27												
450A		436	519		620	565	20-27												
500A		475	569		675	620	20-27												
500A		475	569	30	675	620	20-27					0.5	0.75						

⑤	補強コード	合成繊維		名称	合成ゴム製防振継手						
④	外面ゴム	合成ゴム	EPDM		型式	S-FLEX			JIS10K 相当		
③	内面ゴム	合成ゴム	EPDM								
②	補強リング	SWRH		作図	K.I	検図	K.I	承認	T.O		
①	フランジ	SUS304		図番	12033-10		作成日	2024.6.10			
記号	名 称	材 質	備 考	 株式会社アトムズ							